

F6-I & F6-ID Batten



Feature

- High efficiency, save more energy.
- Soft and uniform light.
- Fast and easy install.
- Directly connecting, form continuous line.
- Long life time, low maintenance cost.
- 5 years warranty, low maintenance cost.
- Long life time, low maintenance cost.

Applicat

- General area lighting.
- Super markets.
- Warehouses.
- Factories.
- Schools.


Specifications

• Length	0.6M & 1.2M & 1.5M	• Material	AL+PC
• Power	10W/20W&20W/40W/43W&80W	• Color Rendering Index	>80Ra, R9>0
• Correlated Color Temperature	4000K	• Certification requirements	CE,RoHS
• Protection class IEC	Class I	• Dimmable	NOT
• Input Voltage	220-240V	• Input Frequency	50/60Hz
• Ingress protection code	IP20	• Lamp life	50000Hrs
• warranty	5 years	• Operating humidity	10%~90%
• Lamps operating temperature	-20°C~+45°C	• Light storage temperature	-20°C~+60°C
• Net Weight (Piece)	0.6Kg & 1.0Kg & 1.3Kg	• Numerator - Packs per outer box	10PCS/Carton
• Installation	Ceiling/suspension install		


	Power	CCT	lm/W	PF	CRI	SDCM	View Angle
F6I 0.6M	10W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6ID 0.6M	10W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6I 0.6M	20W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6ID 0.6M	20W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6I 1.2M	20W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6ID 1.2M	20W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6I 1.2M	40W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6ID 1.2M	40W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6I 1.2M	43W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6ID 1.2M	43W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°
F6I 1.5M	80W	3000K/4000K/5700K/6500K	90/95/100/100	>0.9	>80Ra	<5	110°

Dimensional drawing

F6-I

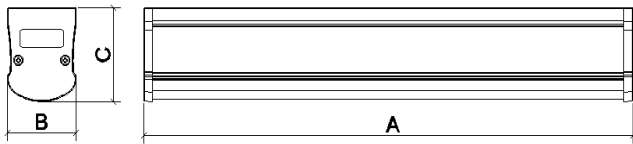


F6-ID

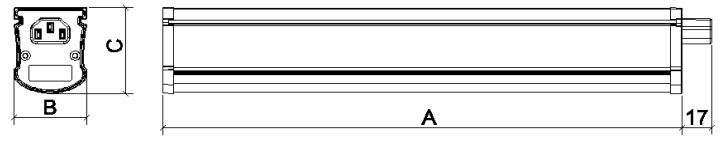

	A	B	C
0.6M F6-I	600mm	52mm	42mm
1.2M F6-I	1200mm	52mm	42mm
1.5M F6-I	1500mm	52mm	42mm
0.6M F6-ID	600mm	52mm	42mm
1.2M F6-ID	1200mm	52mm	42mm
1.5M F6-ID	1500mm	52mm	42mm

Light Distribution

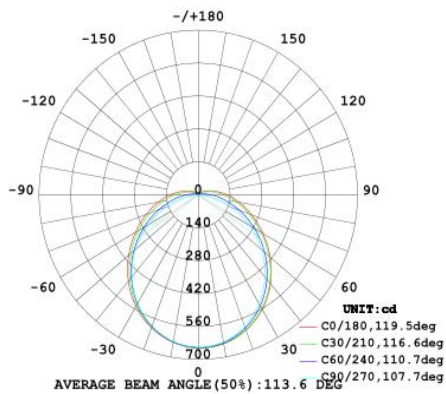

Product details

F6-I



F6-ID (connectable version)



Accessories:

Ceiling install



Suspension install



F6-ID Power cable



F6-ID connecting cable

